

FLAT PANEL MONITORS

29LW081005

8.4" SUNLIGHT READABLE LCD MONITORS

DISPLAY

Type: AM p-Si Colour TFT
No. Colours: 256k
Max. Resolution: 800 x 600 pixels
Active Display Area: 170.4 x 127.8 mm
Backlight: High Brightness
CCFL Module
Backlight Life: 25,000h @ max
brightness
Brightness: 1400 cd/m² max
Contrast Ratio: 350:1 typ
Viewing Angles: 120°H , 105° V

SIGNAL INPUT

Input :

Video: Analog RGB 0.7-1.0Vp-p
Input Connector: 15-pin HD Female
Sync. Type/Level: Separate H&V (+/-ve) TTL

Multiscan Support: 800 x 600 SVGA
640 x 480 VGA
640 x 350 VGA
640 x 400 VGA
DOS text
Horizontal Scan: 30 - 38kHz
Vertical Scan: 56 - 70Hz
Controls: Brightness, Contrast,
(On Screen Display) H/V Position & Size, Clock,
buttons at rear) Clock Phase, Colour, Autoset

POWER INPUT

AC Model: Integral AC Power supply
110/230Vac 50/60Hz
Power Consumption: 40W max

PHYSICAL / ENVIRONMENTAL

Dimensions (approx): 195 x 256 x 300mm
Weight (approx): 2.8Kg
Housing: Aluminium
Operating Temp: 0⁰ to 40⁰ C
Storage Temp: -20⁰ to 60⁰ C

PART NUMBERS

Standard Model 29LW081005

VGA/SVGA Displays



- **Very High Brightness TFT panel 1400 cd/m²**
- **SVGA (800 x 600 pixels) resolution**
- **P-Si technology has good shock/vibration resilience**
- **Multi position adjustable mounting bracket**
- **Touchscreens easily integrated**
- **Rear controls location & remote control facility**
- **Ambient light sensor facility for automatic brightness**
- **CRT Replacement**

The **29LW081005** LCD monitor has been designed for applications in the ATM field and other users that require a SVGA compatible monitor for sunlight viewing.

A light sensor input allows the monitor to be viewed comfortably over a wide range of ambient lighting without any adjustment.

The monitor has a mounting tray that lets the display be moved to many different positions, giving maximum mechanical compatibility with older CRT displays.

Forced air cooling keeps the display cool – especially important when it is used in direct sunlight.

A full set of OSD push buttons on the rear allows precise and easy picture adjustment. A remote controls connector is also included.

Due to a policy of continuous product development KME reserves the right to change specifications and descriptions without prior notification. All trademarks acknowledged. 29lw081005-1 08/2004



<http://www.monitoresindustriales.es>


Tfn: 944 806 678

Fax: 944 806 681

29LW081005

8.4" HIGH BRITE LCD MONITOR

(CRT Chassis Replacement)

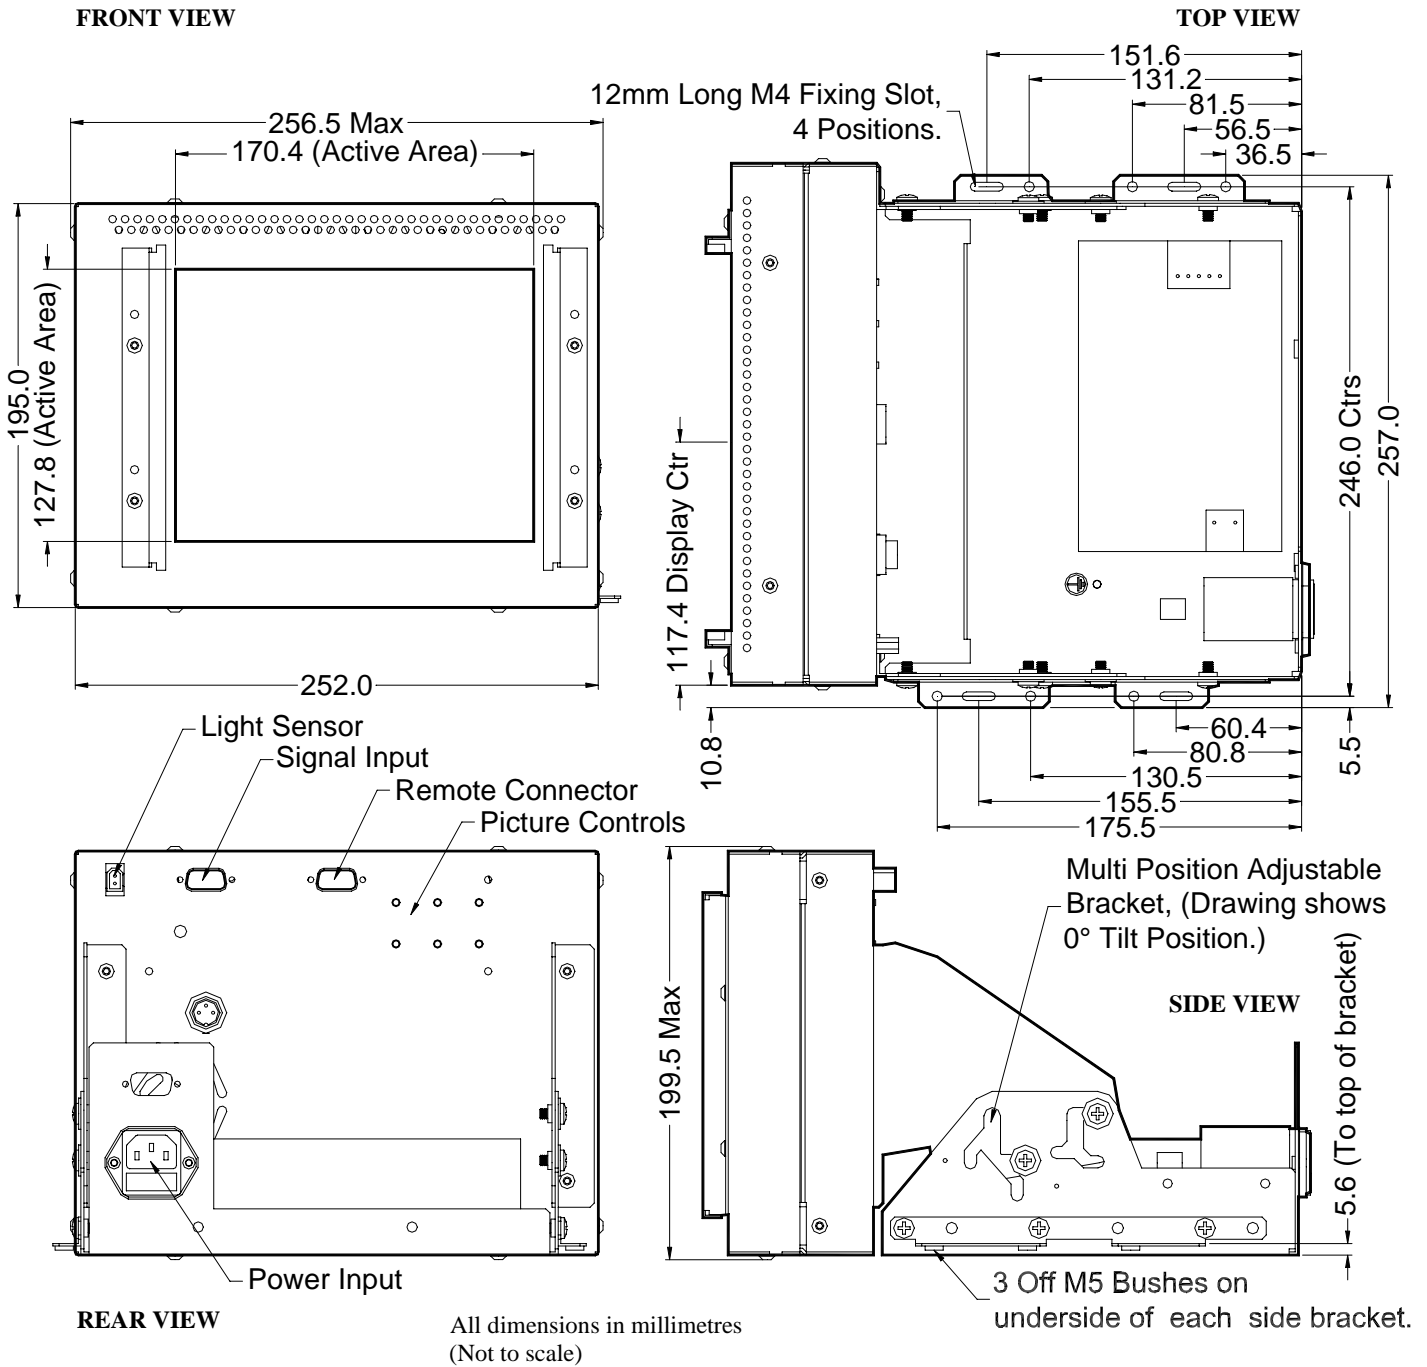

29lw081005-2

08/2004

MONITORES INDUSTRIALES

<http://www.monitoresindustriales.es>

Tfn: 944 806 678

Fax: 944 806 681